


C1244-1002  
Three-System  
Rod Bridge




C1244-1004  
Stop / Start Switch






C1244-1003  
Rosette



C1244-1001  
O-Grips Single  
Module

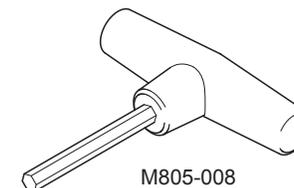

M805-008  
Allen Wrench

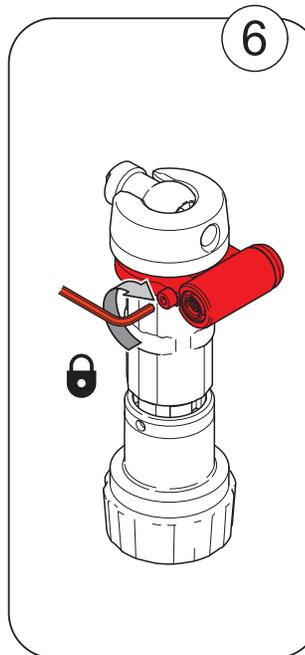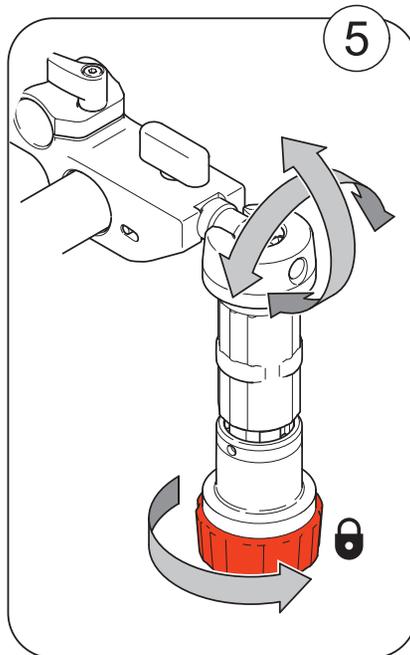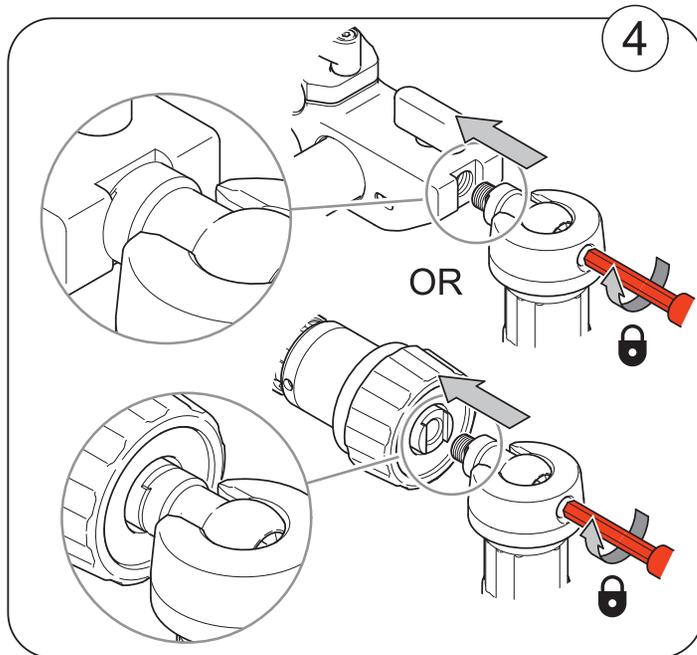

### Congratulations!

Congratulations on your purchase of the new range of genuine OConnor accessories.

#### O-Grips technical data

Construction:	solid titanium core
Payload capacity (maximum):	44 lbs (20 kgs)
Rod fitting (using O-Grips bridge):	15 mm Studio 19 mm Studio 15 mm LWS

Attachment: 3/8" stainless steel top screw with 3/8" bottom thread. Quick and simple using a 5 mm Allen wrench.

Compatible with all common camera configurations with optional accessories. Modular stackable design for custom applications.

#### Need Help?

Need customer support? Visit our web site to contact us or find your local support center (company / contact).

Need inspiring ideas on how to use your O-Grips?

Visit our [O-Grips applications gallery](#) product page for great ideas on using your O-Grips in the field.